


LMS040 - VERTICAL SWING DOWN

Ideal for use on walkways, walls or columns, the **LMS040** - Vertical Swing Down Pole allows for easy access and maintenance of light fittings up to a height of 2.8 metres.

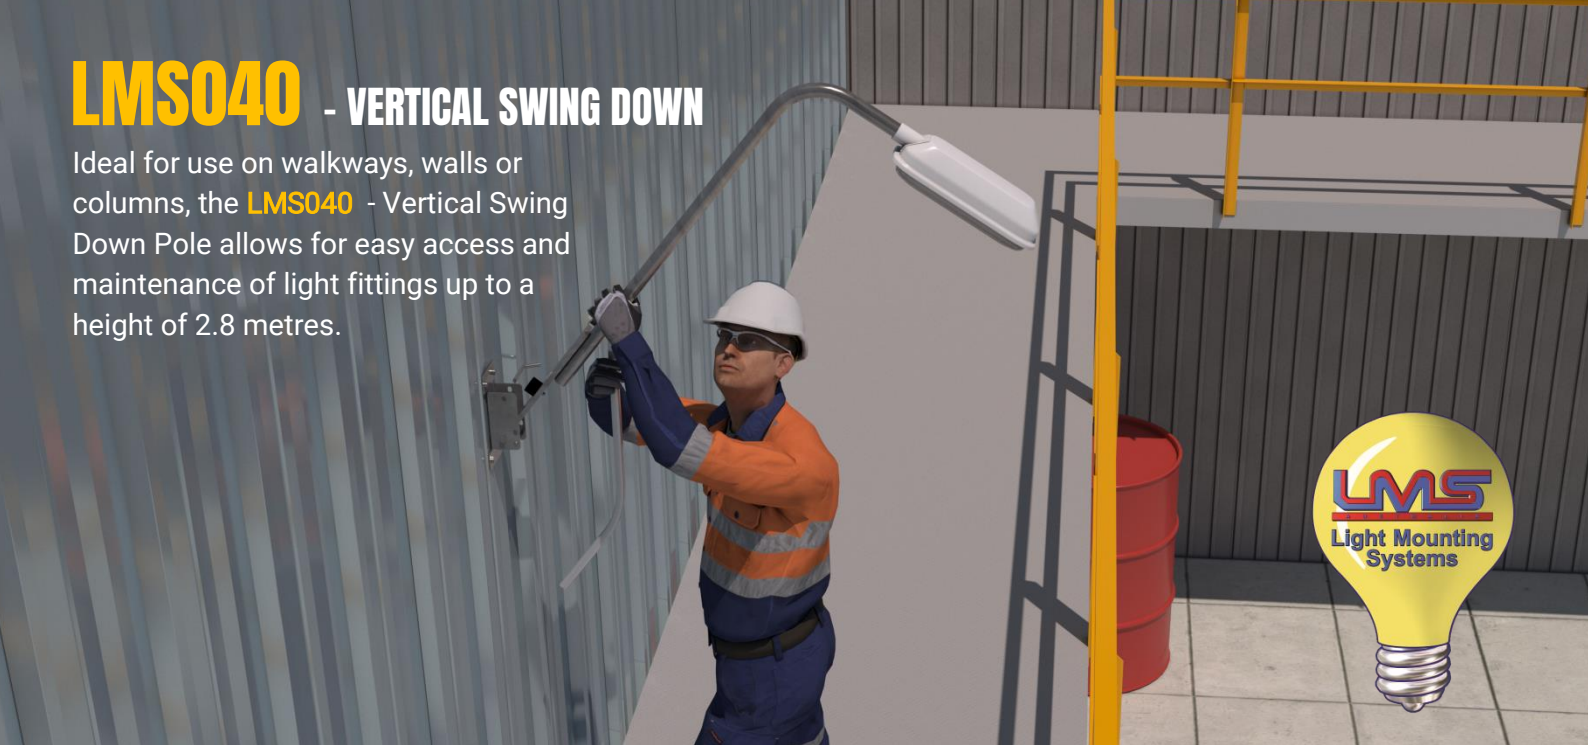

SPECIFICATIONS

Mount	Bolt to Structure
Pole	1.3m approx 25NB pole with spigot outreach Allows for light fitting height of 2.8m approx when mounted 1.5m above floor level
Max Weight	Recommended maximum installed light fitting weight 12kg*
Available	HDG – Hot Dipped Galvanised (LMS040) 316 Stainless Steel (LMS040-SS)
Suitable	Wind Regions A B C D
Standards	Structurally designed in accordance with AS4100-2020 Wind Loads assessed in accordance with AS/NZS1170.2-2011

Recommended maximum installed equipment weight refers to recommended limits for ease of operation, not the items structural/engineered capacity and includes any equipment and associated mounting bracket.

FEATURES & BENEFITS

- Simple one person operation
- Easy release pin lock mechanism. Optional Pin Release/Lowering tool available
- Vertical Swing down design for safe and easy access
- Eliminates the use of specialised access equipment for lighting maintenance
- Available with a wide range of accessories and configuration options for a complete installation solution





LIGHT MOUNTING SYSTEMS AUSTRALIA

Australian Made Lighting Poles & Accessories for accessible Lighting Installations & Maintenance

www.lightmountingsystems.com.au sales@lmsau.com 61 2 4932 9000

LMS040 - VERTICAL SWING DOWN

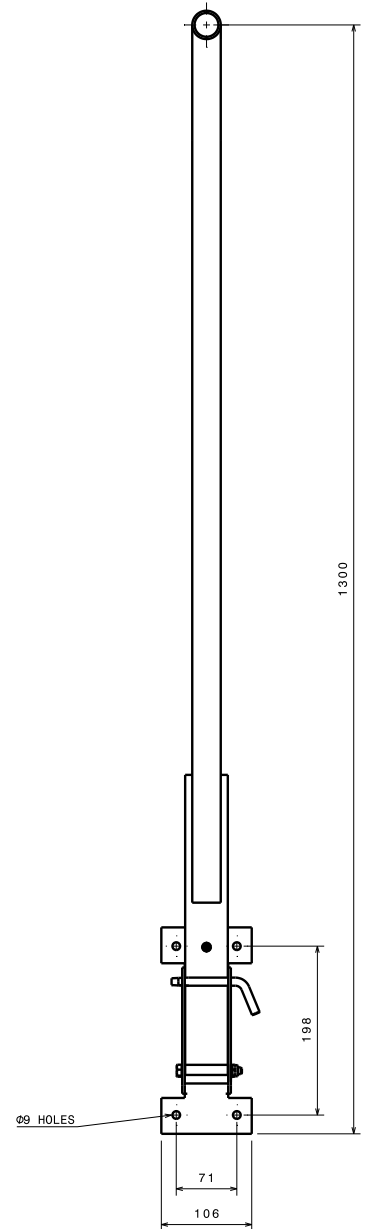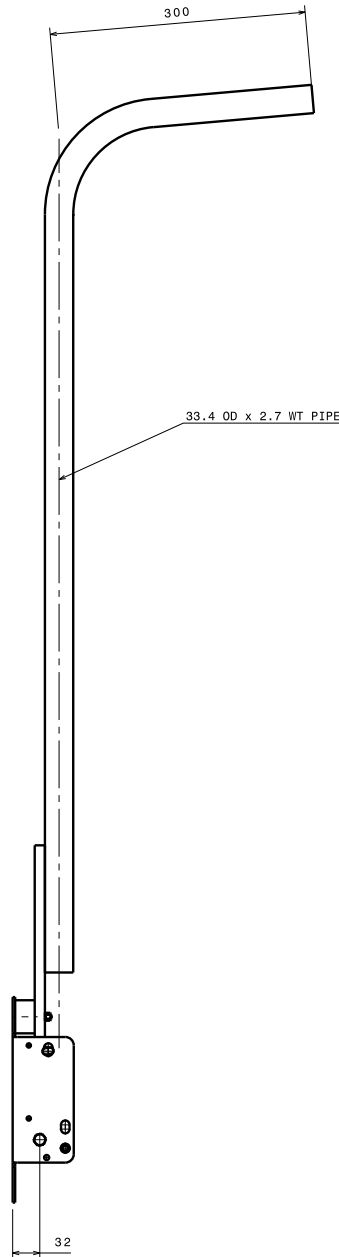

LIGHT MOUNTING SYSTEMS AUSTRALIA

Australian Made Lighting Poles & Accessories for accessible Lighting Installations & Maintenance

www.lightmountingsystems.com.au sales@lmsau.com 61 2 4932 9000