

LMS075 - FLOODLIGHT SYSTEM

Ideal for lighting areas below walkways, stairways or platforms, the LMS075 - Flood Mount Pole is available in a variety of mounting configurations to enable mounting off either 40NB Pipe stanchions, angle iron stanchions, building support columns or similar.



40NB Pipe Stanchion Mount option shown




SPECIFICATIONS

Mount	40NB Pipe Handrail Stanchion (U-Bolt to Stanchion), 65 x 65 Angle Iron Stanchion (Bolt to Stanchion) or Column
Pole	1.4m approx 40NB pole with rotatable head assembly
Max Weight	Recommended maximum installed light fitting weight 15kg*
Available	HDG – Hot Dipped Galvanised (LMS075) 316 Stainless Steel (LMS075-SS)
Suitable	Wind Regions A B C D
Standards	Structurally designed in accordance with AS4100-2020 Wind Loads assessed in accordance with AS/NZS1170.2-2011

Recommended maximum installed equipment weight refers to recommended limits for ease of operation, not the items structural/engineered capacity and includes any equipment and associated mounting bracket.

FEATURES & BENEFITS

- Simple one person operation
- Untightening of one M12 nut allows head rotation over walkway and access to lighting and equipment
- Vary light orientation & head rotation for safe maintenance
- Eliminates the use of specialised access equipment for lighting maintenance
- Available with a wide range of accessories and configuration options for a complete installation solution

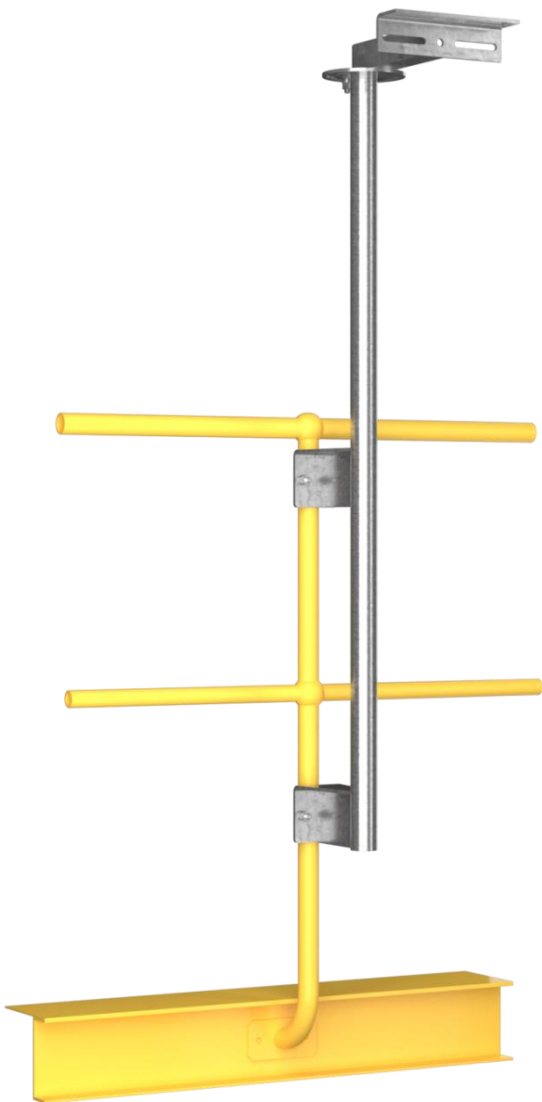



LIGHT MOUNTING SYSTEMS AUSTRALIA

Australian Made Lighting Poles & Accessories for accessible Lighting Installations & Maintenance

www.lightmountingsystems.com.au sales@lmsau.com 61 2 4932 9000



LMS075 - FLOODLIGHT SYSTEM

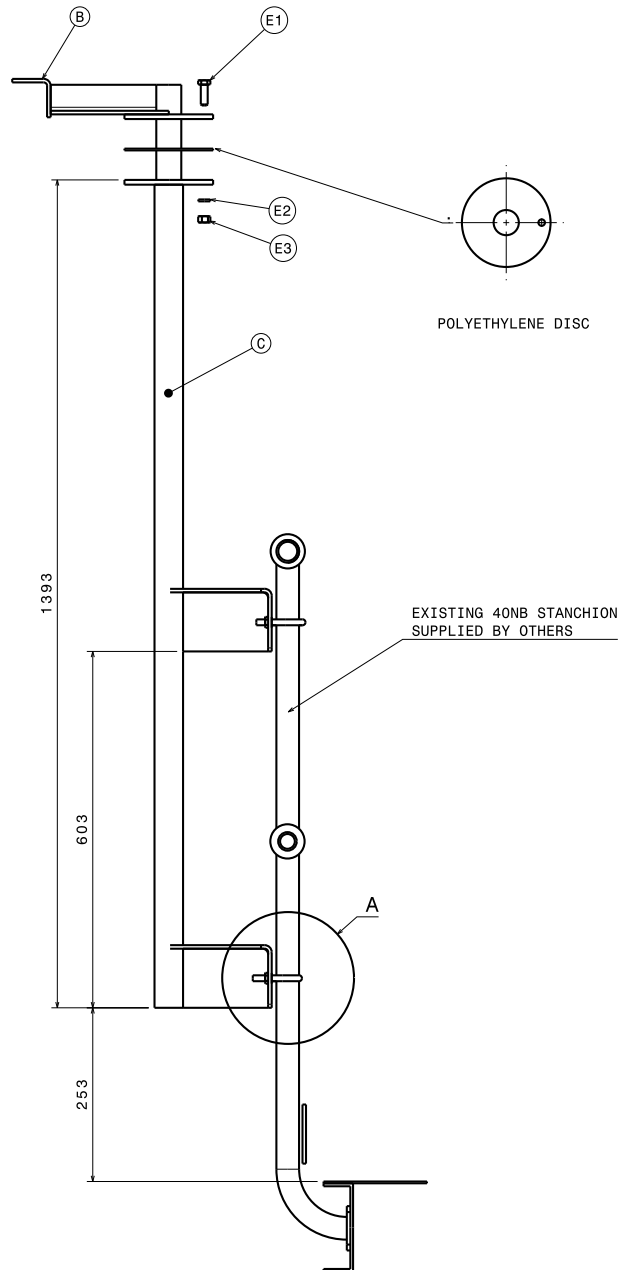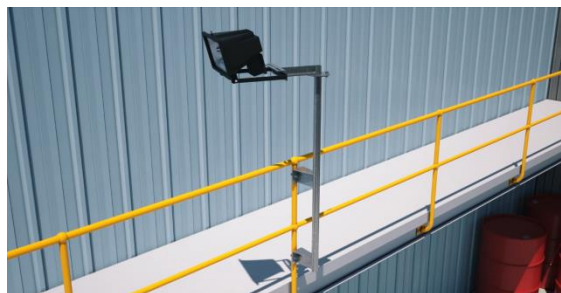

LIGHT MOUNTING SYSTEMS AUSTRALIA

Australian Made Lighting Poles & Accessories for accessible Lighting Installations & Maintenance

www.lightmountingsystems.com.au sales@lmsau.com 61 2 4932 9000