

# LMS075 - FLOODLIGHT SYSTEM

Ideal for lighting areas below walkways, stairways or platforms, the LMS075 - Flood Mount Pole is available in a variety of mounting configurations to enable mounting off either 40NB Pipe stanchions, angle iron stanchions, building support columns or similar.



40NB Pipe Stanchion Mount option shown




## SPECIFICATIONS

Mount	40NB Pipe Handrail Stanchion (U-Bolt to Stanchion), 65 x 65 Angle Iron Stanchion (Bolt to Stanchion) or Column
Pole	1.5m approx 40NB pole with rotatable head assembly
Max Weight	Recommended maximum installed light fitting weight 15kg*
Available	HDG – Hot Dipped Galvanised (LMS075) 316 Stainless Steel (LMS075-SS)
Suitable	Wind Regions A B C D
Standards	Structurally designed in accordance with AS4100-2020 Wind Loads assessed in accordance with AS/NZS1170.2-2021

*Recommended maximum installed equipment weight refers to recommended limits for ease of operation, not the items structural/engineered capacity and includes any equipment and associated mounting bracket.*

## FEATURES & BENEFITS

- Simple one person operation
- Untightening of one M12 nut allows head rotation over walkway and access to lighting and equipment
- Vary light orientation & head rotation for safe maintenance
- Eliminates the use of specialised access equipment for lighting maintenance
- Available with a wide range of accessories and configuration options for a complete installation solution

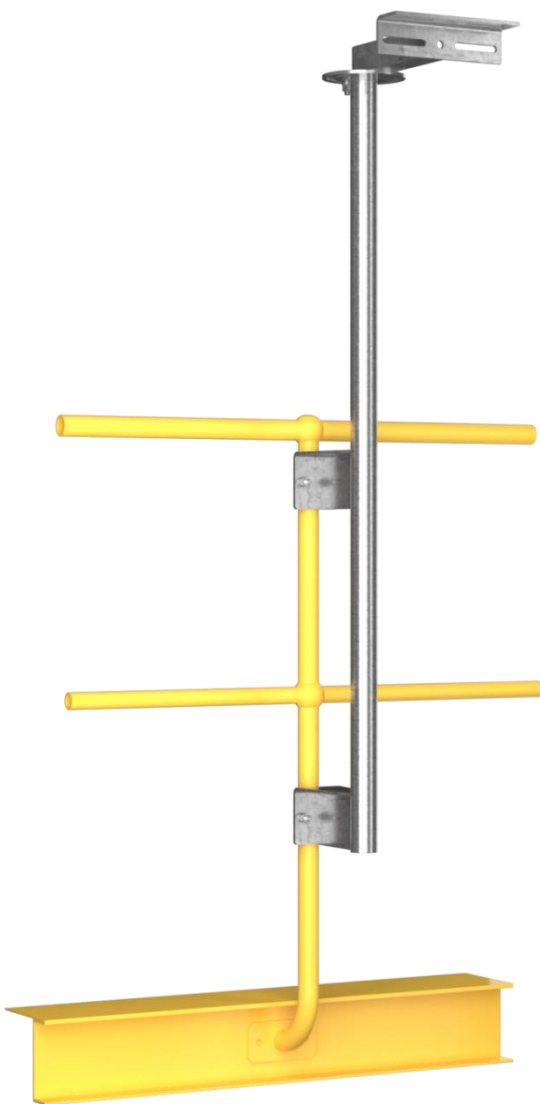



## LIGHT MOUNTING SYSTEMS AUSTRALIA

Australian Made Lighting Poles & Accessories for accessible Lighting Installations & Maintenance

www.lightmountingsystems.com.au sales@lmsau.com 61 2 4932 9000



# LMS075 - FLOODLIGHT SYSTEM

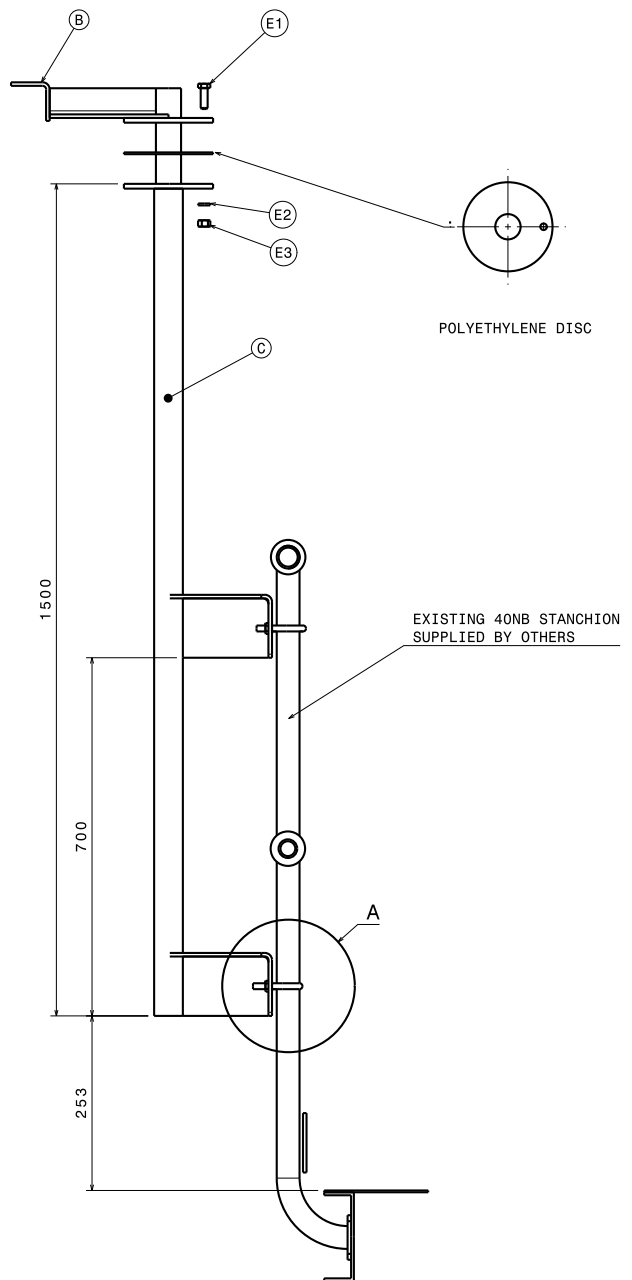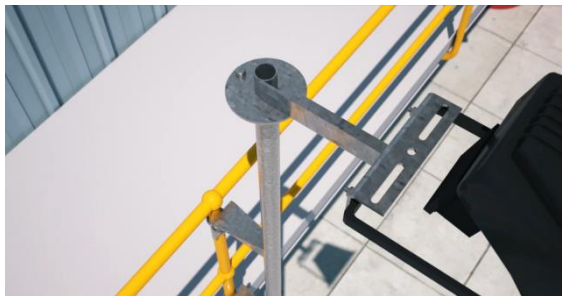

## LIGHT MOUNTING SYSTEMS AUSTRALIA

Australian Made Lighting Poles & Accessories for accessible Lighting Installations & Maintenance

www.lightmountingsystems.com.au sales@lmsau.com 61 2 4932 9000